

# Contents

---

<b>INTRODUCTION.....</b>	<b>3</b>
<b>INSTALLATION OF THE DETECTION LOOP.....</b>	<b>4</b>
2.1 Positioning.....	4
2.2 Installation of the detection loop.....	6
2.3 Testing the detection loop installation.....	6
<b>INSTALLATION/OPERATION OF TRANSPONDER.....</b>	<b>8</b>
3.1 Installation of the transponder.....	8
3.2 Charging instructions.....	9
3.3 Led indication.....	10
3.4 Sleep mode.....	10
3.5 Cleaninig instructions.....	11

## Appendices

APPENDIX A - USEFUL TOOLS/PARTS/EQUIPMENT.....	12
APPENDIX B - TECHNICAL SPECIFICATIONS.....	13
APPENDIX C - CE AND FCC REGULATIONS.....	14
GUARANTEES & WARRANTIES.....	15

# **Contact Information**

---

## **MYLAPS EMEA Office**

Haarlem  
The Netherlands  
Tel: +31 23 529 1893  
E-mail: [info@mylaps.com](mailto:info@mylaps.com)

## **MYLAPS Americas Office**

Atlanta  
USA  
Tel: +1 (678) 816 4000  
E-mail:  
[info.americas@mylaps.com](mailto:info.americas@mylaps.com)

## **MYLAPS Japan Office**

Tokyo  
Japan  
Tel: +81 3 5275 4600  
Email:  
[info.japan@mylaps.com](mailto:info.japan@mylaps.com)

## **MYLAPS Asia Pacific Office**

Sydney  
Australia  
Tel: +61 (0)2 9546 2606  
Email:  
[info.asia.pacific@mylaps.com](mailto:info.asia.pacific@mylaps.com)

**[www.mylaps.com](http://www.mylaps.com)**



## **All rights reserved**

Copyright © 2003-2010 MYLAPS (formerly AMB i.t.)

This publication has been written with great care. However, the manufacturer cannot be held responsible, either for any errors occurring in this publication or for their consequences.


The sale of products, services of goods governed under this publication are covered by MYLAPS's standard Terms and Conditions of Sales and this product manual is provided solely for informational purposes. This publication is to be used for the standard model of the product of the type given on the cover page.

MYLAPS

Manual: MYLAPS MX/01-2010

# 1: Introduction

The MYLAPS MX timing system, previously known as the AMBmx system, is designed to time and score motocross events. The signal sent by an MYLAPS MX Rechargeable Power transponder, previously known as the AMBmx transponder, is picked up by the detection loop, installed in the track surface. The transponder itself is mounted on the motorcycle behind the number shield. The detection loop is connected to the MYLAPS MX decoder. The decoder timestamps the received transponder signals and sends this data to a connected computer.

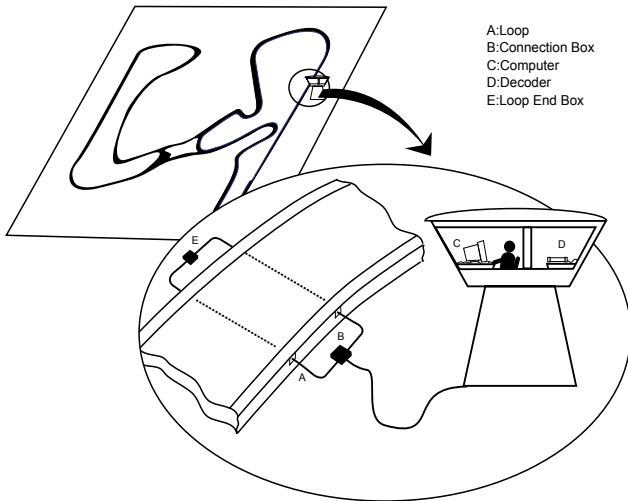


**Figure 1.1 System overview**

## 2: Installation of the detection loop

To install the MYLAPS MX system, one needs to install the detection loop, connect the decoder and mount the MYLAPS MX Rechargeable Power transponder to the motorcycle. For optimal results, please follow the instructions as described carefully. Appendix A contains a list of useful tools for installing the detection loop.

### 2.1 Positioning the detection loop

All wiring of the detection loop must be installed according to the drawing below in order to avoid a serious degradation in the performance of the system.

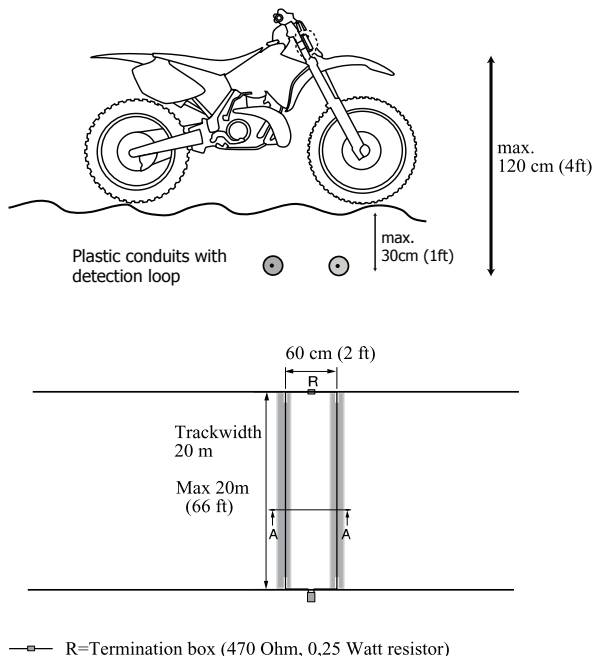

**Figure 2.1 Detection loop installation overview**

## **Positioning the detection loop**

- The detection loop must be positioned in such a way that, the transponder is above the center of the detection loop when the front of the motorcycle crosses the finish line. Make sure motorcycles cannot pass outside the detection loop. Extend the detection loop outside the track if necessary.
- The detection loop can be used for a track width of a maximum 20m (66ft).
- The maximum depth should be chosen in a way that the motorcycles cannot dig out the detection loop. However, please respect the maximum distance between loop and transponder, which is 120cm (4ft). Put the loop wires in the plastic conduits in the track 60cm (2ft) apart.
- The detection loop is sensitive to interference sometimes emitted by nearby cables. When possible, keep other cables 5m (15ft) away. Also make sure motorcycles on other parts of the track will not get closer than 5m (15ft) to the detection loop, to avoid false inputs.

---


## **LEARNED BY EXPERIENCE**

When pulling the detection loop wire through the plastic conduit, it is a good idea to pull another non-metal wire through. This wire then can be used to install a new loop wire in case it gets damaged.

---

## 2.2 Installation of the detection loop

- Put the wires of the detection loop through the plastic conduits and cut the excess length of the detection loop wires.
- When all wires are installed, place the heat shrinkage sleeve over a detection loop wire end. Then solder the loop wire end to the short wire end of the connection box. When soldering the wires together, the solder should flow through the entire connection and not only around it. Now put the shrinkage sleeve over the soldered connection and hold it over a heat source to shrink the sleeve (also see the drawing below). Repeat this procedure for the second wire end of the detection loop.
- Fill the trench with the plastic conduits with sand. Before doing this, please test the loop as described in the next section. Make sure that the motorcycles cannot dig out the plastic conduits with the loop.

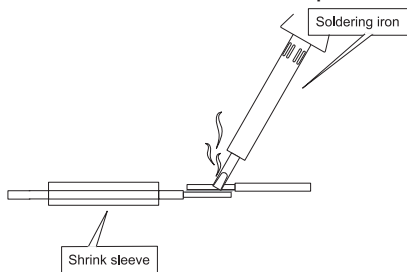

**Figure 2.2 Solder the loop wire end**

## 2.3 Testing the detection loop installation

Once the loop has been installed, it should be tested to ensure that it is functioning correctly. We also recommend repeating the same procedure at the start of each race event. You can determine if your loop is functioning correctly by doing the following tests:

- Connect the detection loop to the decoder and computer running MYLAPS timing software (also see the separate decoder manual). Check the background noise, which is updated every five seconds in the MYLAPS timing software. The background noise level should be between 0 and 40 points. A higher value may indicate interference by other electrical equipment in the area or a bad loop installation. Try switching off any suspected equipment or removing nearby objects and check for improvements. Especially at night, short-wave radio transmitters may cause an increased background noise.
- If a detection loop has been correctly installed, a transponder should be picked up at the same distance along the entire detection loop. To test this, stand at one end of the detection loop about 8m (25ft) away and hold a transponder approximately 120cm (4ft) off the ground. Walk slowly towards the detection loop. You will hear a beep in the headphones attached to the decoder when the transponder is detected. Mark the spot where the transponder was detected. Repeat the process for the middle and other end of the detection loop and do the same coming from the other direction. The detection distance from the loop should be approximately the same for all positions (< 20% variation).
- Check the signal strengths of the transponders as they are picked up by the system during a test with motorcycles (also see paragraph 3.1 Installation of the Transponder). A good loop will yield consistent transponder signal strengths of at least 100 points with a hit rate of at least 10 points. The hit rate may vary depending on the speed of the transponder passings (slower passings yield higher hit counts), but the signal strength should be consistent (< 10 points variation).


# 3. Transponder Installation/ Operation

## 3.1 Installation of the transponder

The MYLAPS MX Rechargeable Power transponder is battery-powered and can be recharged in a 34-position charger case or single charger.

### Positioning the transponder

The position of the transponder must be identical on all motorcycles competing in the race. Fix the transponder (or holder) vertically, with a maximum distance of 120cm (4ft) above the loop. Make sure that the transponder has a clear opening to the track with no metal or carbon fiber beneath it. Maximum operating temperature should not exceed 50°C (122°F)


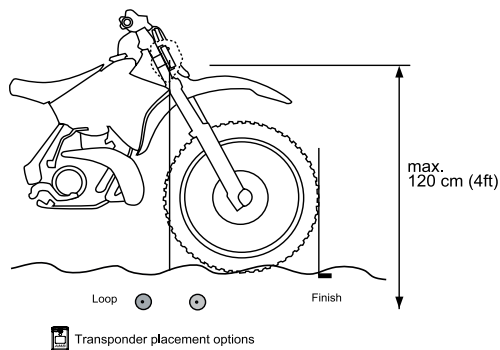


**Figure 3.1 Transponder placement**

### Installation of the transponder

Fix the holder on the motorcycle, as shown on the holder, on top by using tie-wraps or screws. Fasten the transponder in the holder using the supplied fixing pin.






**Figure 3.2 Fastening the transponder in the holder**

## **WARNING**

A detached transponder can be very dangerous! Make sure the transponder cannot get detached. Use additional tie-wraps to secure the pin.

## **3.2 Charging instructions**

Transponders can be charged in an individual charger or in a charger case.



**Figure 3.3 : Charging cradle**

- Plug the power adapter into an electrical outlet and place the transponder on the charging unit.
- The transponder's Led will flash red indicating that the transponder is charging.
- After about 16 hours a steady green Led indicates that the transponder is fully charged.

A full charge yields a minimum of 4 days use. The Led flashing color and pattern indicates the remaining working days of the transponder. See the next paragraph for the complete information.

### 3.3 Led indication

The Led on the transponder provides the information of the transponder status

LED Flashing color/pattern	Description
Flashing ...times green	Minimum ... days left before the battery is empty
Flashing red (not in the charger)	Less than 1 day of functioning left
Continuously red	The transponder stops working at any moment, charging is required
No Light	Transponder is discharged
Flashing red (in the charger)	Transponder is charging
Continuous green (in the charger)	Transponder fully charged
No Light (in unplugged charger)	Transponder is in sleep mode

**Figure 3.4: Led indication**

### 3.4 Sleep mode

The sleep mode is designed to turn off the transponder's signal and save battery life. It is necessary to use the Sleep mode when travelling by airplane to adhere to airline regulations. While in Sleep mode, the transponder's charge-

discharge cycle will last up to 3 times longer.

- Switching a transponder into sleep mode  
A charged/functioning transponder can be put into a sleep mode by placing it in an unpowered charging cradle or charger case.
- Switching the transponder back to normal mode  
Normal functioning resumes when the transponder is removed from the cradle or charger case.

### **3.5 Cleaning instructions**

Over the course of time, transponders can become soiled in various ways. Normal dirt can be removed from the transponder with a soft brush and warm clean water up to 50°C. Cleaning electrical contacts: We recommend to spray Isopropyl alcohol on the contacts of the transponder and on the charger. Rub the contacts with ear sticks to clean them on a regular basis.

#### **Caution**

**MAKE SURE THE TRANSPONDER IS DRY BEFORE CHARGING.**

**CHARGE YOUR TRANSPONDER ONCE EVERY 3 MONTHS.**

**DO NOT LEAVE THE TRANSPONDER IN A POWERED CHARGING CRADLE OR CHARGING RACK MORE THAN 24 HOURS.**

**DO NOT CLEAN TRANSPONDERS WITH AUTOMOTIVE CLEANING PRODUCTS OR OTHER DETERGENTS.**

**DO NOT USE HIGH PRESSURE WATERGUNS OR OTHER (DISH)WASHING MACHINES TO CLEAN OR RINSE THE TRANSPONDERS.**

## **Appendix A: Useful tool/parts/ equipment**

---

### Useful Tools

- Multi meter (Range at least: 1 Ohm - 1 Mega Ohm)
- Wire cutter / stripper
- BNC Crimp tool for RG 58 & RG 59
- (Butane) Soldering gun
- Blade knife
- Coax stripper
- Screw driver (normal and Phillips)

### Useful Spare Parts

- BNC couplers (3 pieces)
- BNC connectors 5mm 75 Ohm
- BNC connectors 3mm 75 Ohm
- Shrink sleeves
- Spare loop (for tracks up to 20 m (65 ft) wide)
- Electrical tape

Please contact MYLAPS if you would like to receive detailed specifications on any of the above items. You can find our contact details on page 2 of this manual.

## **Appendix B: Technical Specifications**

### **MyLaps MX Rechargeable Power Transponder (formerly AMBmx transponder)**

Numbers available	: unlimited
Dimensions	: 73x50x22 mm (approx. 2.9x2x0.9")
Weight : 90 g	
Housing	: Water- and shockproof
Max. speed	: 120 km/h (75 mph)
Timing resolution	: 0,006 sec
Temperature range	: 0 - 50 °C (32 - 122 °F)
Operating time	: min. 4 days after full charge
Charge time	: min. 16 hours for full charge
Charge indicator	: LED indicates remaining operating time in days
Signal transfer	: magnetic induction
Transponder position	: max. height 120 cm (4 ft)

### **Detection Loop**

Track width	: max. 20 m (66 ft)
Coax to decoder	: max. 100 m (330 ft)

### **Transponder Chargers**

Individual charger	: 12 VDC / 0,05 A
34 position charger case	: 12 VDC / 2,5 A

Specifications are subject to change without notice.

## Appendix C: CE and FCC Regulations



### **CE information:**

This device complies with the EMC directive 89/336/EEC. A copy of the declaration of conformity can be obtained at:

MYLAPS EMEA Office Haarlem  
Zuiderhoutlaan 4  
2012 PJ Haarlem  
The Netherlands



### **FCC information:**

This equipment complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This equipment may not cause harmful interference, and (2) this equipment must accept any interference received, including interference that may cause undesired operation.

# **Guarantees & Warranties**

---

MYLAPS, formerly AMB, warrants that, for a period of three (3) years from the date of shipping the decoders and the MYLAPS MX Rechargeable Power (AMBmx), MYLAPS RC DP (AMBrc DP), MYLAPS KART DP (TranX160 DP), MYLAPS Kart Rechargeable Power (TranX160), MYLAPS Car/Bike DP (TranX260 DP), MYLAPS Car/Bike Rechargeable Power (TranX260), MYLAPS Car/Bike Pro (TranX Pro) transponders covered by this warranty with defects, as determined solely by MYLAPS, caused by faulty materials, workmanship or design will be repaired or replaced, unless such defects were the result of any of the following: shipping; improper installation, maintenance or use; abnormal conditions of operation; attempted modification or repair by the customer or any third party; use of the goods in combination with other items; or an act of God. If repair or replacement of the goods is not possible or economical for MYLAPS, MYLAPS may, at its option, refund the purchase price of the goods or deliver replacement goods at its sole discretion. MYLAPS's liability shall be strictly limited to replacing, repairing or issuing credits at its option.

MYLAPS warrants that, for a period of two (2) years from the date of shipping the ProChip, MYLAPS Kart Fixed Power (TranX140) and the MYLAPS RC Rechargeable Power (AMBrc) transponders covered by this warranty with defects, as determined solely by MYLAPS, caused by faulty materials, workmanship or design will be repaired or replaced, unless such defects were the result of any of the following: shipping; improper installation, maintenance or use; abnormal conditions of operation; attempted modification or repair by the customer or any third party; use of the goods in combination with other items; or an act of God. If repair or replacement of the goods is not possible or economical for MYLAPS, MYLAPS may, at its option, refund the purchase price of the goods or deliver replacement goods at its sole discretion. MYLAPS's liability shall be strictly limited to replacing, repairing or issuing credits at its option.

MYLAPS warrants that, for a period of one (1) year from the date of shipping the MYLAPS Onboard Display kit (TnetX Display Kit) covered by this warranty with defects, as determined solely by MYLAPS, caused by faulty materials, workmanship or design will be repaired or replaced, unless such defects were the result of any of the following: shipping; improper installation, maintenance or use; abnormal conditions of operation; attempted modification or repair by the customer or any third party; use of the goods in combination with other items; or an act of God. If repair or replacement of the goods is not possible or economical for MYLAPS, MYLAPS may, at its option, refund the purchase price of the goods or deliver replacement goods at its sole discretion. MYLAPS's liability shall be strictly limited to replacing, repairing or issuing credits at its option.

MYLAPS warrants that, for a period of one (1) year from the date of shipping, all other goods covered by this warranty with defects, as determined solely by MYLAPS, caused by faulty materials, workmanship or design will be repaired or replaced, unless such defects were the result of any of the following: shipping; improper installation, maintenance or use; abnormal conditions of operation; attempted modification or repair by the customer or any third party; use of the goods in combination with other items; or an act of God. If repair or replacement of the goods is not possible or economical for MYLAPS, MYLAPS may, at its option, refund the purchase price of the goods or deliver replacement goods at its sole discretion. MYLAPS's liability shall be strictly limited to replacing, repairing or issuing credits at its option.

If the requirements set forth above and described under Remedies and Damages are not complied with, our warranty/guarantee shall not apply and we shall be discharged from all liability arising from the supply of defective goods.

EXCEPT AS EXPRESSLY PROVIDED IN THIS SECTION, MYLAPS MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND, NATURE OR DESCRIPTION, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OR MERCHANTABILITY, FITNESS OF THE GOODS FOR ANY PARTICULAR PURPOSE, OR NONINFRINGEMENT, AND MYLAPS HEREBY DISCLAIMS THE SAME.

### **Remedies and Damages**

1. MYLAPS shall not incur any liability under the above warranty unless:
  - i) MYLAPS is promptly notified in writing upon discovery by the customer that such goods do not conform to the warranty, and the appropriate invoice number and date of purchase information is supplied;
  - ii) The alleged defective goods are returned to MYLAPS carriage pre-paid;
  - iii) Examination by MYLAPS of goods shall confirm that the alleged defect exists and has not been caused by unauthorized use (including, without limitation, the use of an AMB decoder with non-MYLAPS hardware) misuse, neglect, method of storage, faulty installation, handling, or by alteration or accident; and
  - iv) With respect to MYLAPS decoders, customer has upgraded the firmware in its decoder within one month after MYLAPS has offered to provide customer with such upgraded firmware.
2. The customer acknowledges that the goods may include certain firmware imbedded therein. MYLAPS hereby grants a license to customer to use the imbedded firmware in an MYLAPS decoder, but only to the extent the decoder is used in connection with MYLAPS hardware. MYLAPS shall have the right to terminate the license immediately upon written notice to customer in case MYLAPS has a reasonable belief that customer at any time has used the MYLAPS decoder in connection with non-AMB hardware. Further, customer may not copy, compile, reverse compile, disassemble, translate, analyze, reverse engineer or attempt to reverse engineer the firmware, except as permitted by applicable law.
3. In addition, customer grants MYLAPS the option to repurchase any MYLAPS decoder if MYLAPS has a reasonable belief that customer has used the MYLAPS decoder in connection with non-MYLAPS hardware. The repurchase price shall be the fair market value on the date MYLAPS provides notice to customer that it intends to repurchase the decoder.

The above mentioned warranty/guarantee is irrespective of any rights granted to the buyer of MYLAPS equipment manufactured or sold by MYLAPS based on the laws of the Netherlands. Any correspondence regarding the above mentioned guarantee must be addressed to MYLAPS:

MYLAPS EMEA OFFICE HAARLEM  
Zuiderhoutlaan 4  
2012 PJ HAARLEM  
THE NETHERLANDS  
E-mail: info@mylaps.com  
Fax: +31 23 529 0156